



**SPEL**  
Safety in mind



**SPECTRE**  
PRODUCT DATA SHEET

# SPECTRE



LOW PROFILE  
SINGLE-SIDED  
EMERGENCY  
EXIT BOX

## FEATURES

- IDEAL FOR USE IN FINAL EXITS.
- ROBUST STEEL CONSTRUCTION WITH HIGH QUALITY WHITE POWDER COATED FINISH.
- OPAL POLYCARBONATE PANELS ILLUMINATE DIRECTLY BELOW THE SIGN TO THE ESCAPE ROUTE AND DOOR THRESHOLD.
- SUITABLE FOR WALL OR CEILING MOUNTING.
- PUSH-FIT TERMINALS FOR EASIER AND QUICKER INSTALLATION.
- SUPPLIED COMPLETE WITH A SPECIFIED EN7010 FORMAT POLYCARBONATE LEGEND PANEL.
- 3 HOURS MAINTAINED EMERGENCY DURATION SUPPLIED BY INTEGRAL NICAD BATTERIES.
- HIGHLY EFFICIENT LED LIGHT SOURCE.
- REAR BESA ENTRY AND KEYHOLE SLOTS FOR EASE OF INSTALLATION.
- LEGEND PANEL REMOVED VIA REMOVABLE END-CAP.
- 3 YEARS PRODUCT WARRANTY.
- 54,000 HOURS LED LIFE.
- CRI 80 (MINIMUM).
- 6500K COLOUR TEMPERATURE.

## PRODUCT CODE

CODE	WATTS	EMERGENCY DURATION	MAINS LUMENS	EMERGENCY LUMENS
SC/LED/M3	3W	3 HOURS		

## VIEWING DISTANCE

33 METRES



EMERGENCY  
EXIT SIGN



LED LIGHT  
SOURCE



IP20 INGRESS  
RATING




3 YEARS  
WARRANTY

# PRODUCT DATA SHEET



## DIMENSIONS

FRONT VIEW

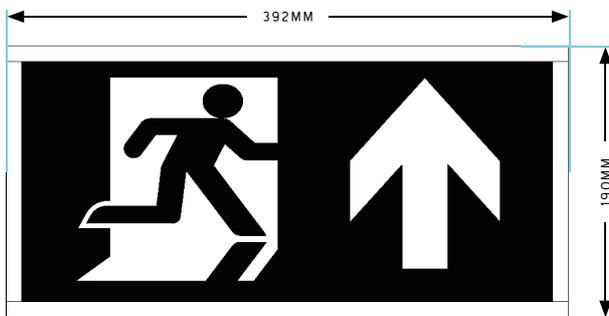

SIDE VIEW



1.3 KG

WEIGHT

## LEGEND OPTIONS



SUFFIX L16EB/7010/SC



SUFFIX L17EB/7010/SC



SUFFIX L19EB/7010/SC



SUFFIX L20EB/7010/SC

## SPECIFICATION

### GENERAL SPECIFICATION

CE MARK COMPLIANCE:  
CE MARKED, REACH, ROHS & UKCA  
COMPLIANT

MANUFACTURED TO STANDARDS:  
IN ACCORDANCE WITH  
BS60598-2-22

MANUFACTURING QUALITY  
APPROVAL:  
ISO 9001:2015

### CONSTRUCTION

BODY CONSTRUCTION:  
WHITE POWDER COATED  
SHEET STEEL

PROTECTION DEGREE:  
IP20

INSULATION CLASS:  
CLASS I

LEGEND MATERIAL:  
POLYCARBONATE

CABLING:  
90°C SINGLE CORE 0.8MM TO  
BS6500 GRADE 5

SUPPLY VOLTAGE:  
220/240V AC 50/60HZ

### CONTROL GEAR

DESIGN/MANUFACTURE:  
DESIGNED AND MANUFACTURED IN  
ACCORDANCE WITH BS EN61347-2-7,  
BS EN61347-2-13, BS EN62384,  
BS EN55015, BS EN61000-3-2 AND  
BS EN61000-3-3

BATTERIES:  
SUITABLE FOR USE WITH NICAD  
BATTERY TECHNOLOGY

### LED'S

LED TYPE:  
2835 SMT MID POWER  
LED COLOUR TEMPERATURE:  
6500K

CRI (MINIMUM):  
80

LED LIFETIME:  
TM21 L70 > 54,000 HOURS



**SPEL**  
Safety in mind

## HEAD OFFICE

SPEL SAFETY  
ORBIK HOUSE  
NORTHGATE WAY  
ALDRIDGE  
WALSALL  
WEST MIDLANDS

TEL: 01922 743515  
EMAIL: UKSALES@ORBIK.CO.UK



[WWW.ORBIK.CO.UK](http://WWW.ORBIK.CO.UK)